


NOE Freestanding Enclosure

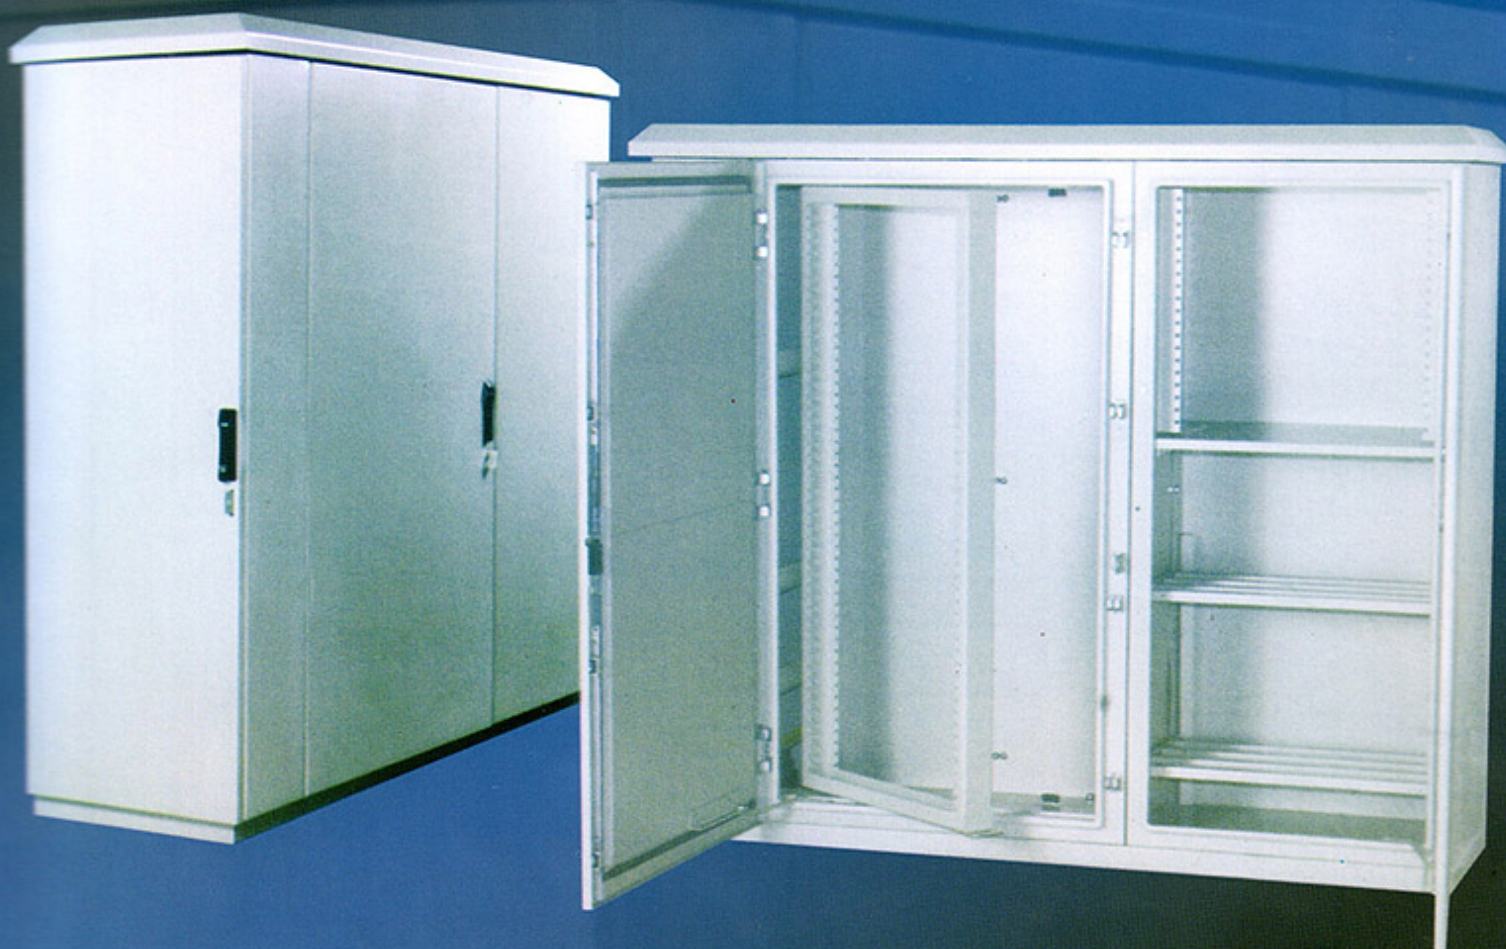

Nobi NOE Freestanding enclosure is a perfect solution for providing an industry-leading protection for telecommunication systems and equipments in outdoor environments.

Available in two special designs, with and without aluminum extrusion structural frame, both capable of providing maximum protection from environment hash such as water and dust. Constructed with double skin design provide excellent protection from heat generated by sunlight. Combine NOE with our Heat Exchanger product makes this enclosure as a perfect long life-rust free-heat managed solution for you.

Material :
Aluminum Extrusion Alloy 6063-T6 for Frame
Aluminum Alloy 5052 H32 for Covers

Gasket :
Continous Pollyurethane.

Lock System :
Swing Handle Trimline four point locking, or
Swing Handle PA Black three point locking.

Surface Finish :
Powder Coating in textured RAL 7032

Protection Category :

- IP 55 to EN 60529 and IEC 529
- NEMA 12

Supply Include :
Customized dimension.

Possible Design :
Cut out at any position.

Available Accessories :
Rain Canopy, Swing Frame, Plinth, Door Stay.

Note :
For information about modifications and additional accessories please contact our Sales Engineer.


freestanding enclosure

NOE Freestanding Enclosure

Design Outline


NOE Freestanding Enclosure

NOE Freestanding Without Frame


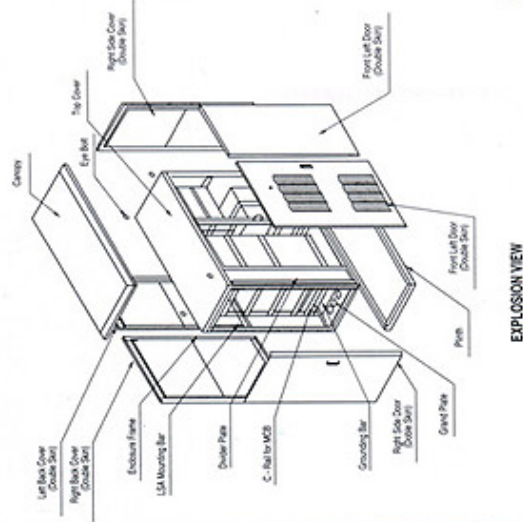


EXPLOSION VIEW


ISOMETRIC VIEW W/O COVER



ISOMETRIC VIEW

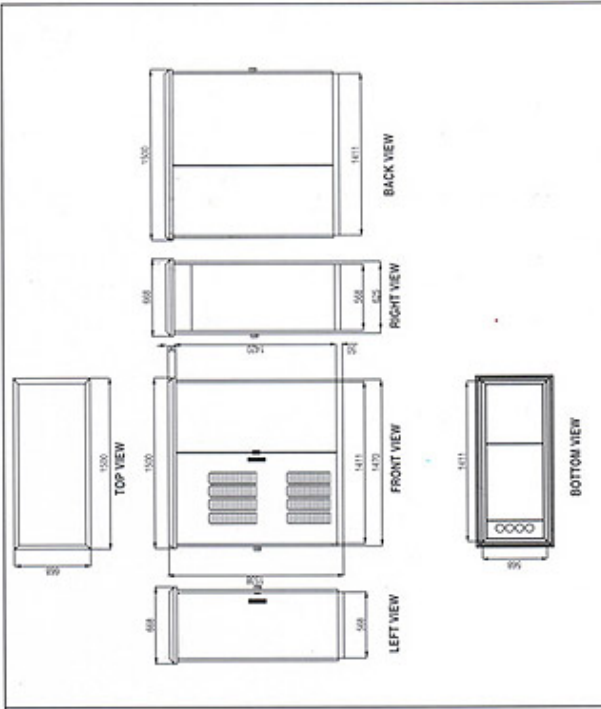

NOE Freestanding Without Frame

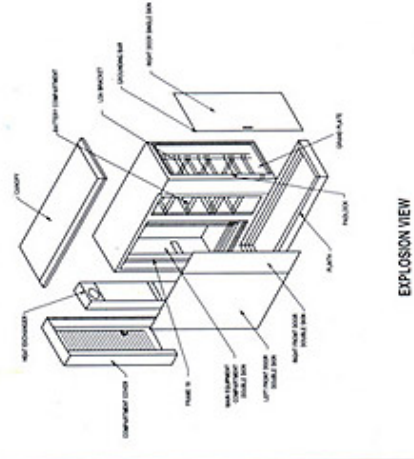

EXPLOSION VIEW



BACK VIEW




FRONT VIEW W/O DOOR



RIGHT VIEW W/O DOOR



ISOMETRIC VIEW W/O DOOR



BOTTOM VIEW



EXPLOSION VIEW